

# acecube

versatile



acecube  
versatile

### APPROVALS & CERTIFICATIONS

- UN 31 A/Y
- (IBC) Intermediate Bulk Container
- Adhering to ADR Regulation
- Lifting when Full Certified 450L - 3000L
- PPG 2 & PPG 26
- Vibration Tested
- Patent Design (No. GB2502198)

### Design Features

✓	Bi-directional forklift pockets, Internal baffle plates. Galvanized hatch lids, stacking corners & lifting eyes. Including a fully integrated Galvanized base frame
✓	Designed to stack inside shipping containers & across truck beds providing economical transportation
✓	Unique hexagonal corners for extra strength. Three letter box openings for secure & safe hose connections
✓	Large designed dispensing gun equipment compartment with fixed arrangements to carry hose reels, pumps, gun nozzles, cables, batteries & bund alarms
✓	110% bunded tank capacity - to meet the global environmental regulations
✓	Completely removable inner tank for easy maintenance & cleaning
✓	Primary & secondary hatch plates - for multiple use & versatility. The primary hatch plate acts as a man way
✓	The primary hatch plate is fitted with a 3 inch fill pipe, three - 1" return pipes & three - 1 1/4" feed pipes as standard for multiple use
✓	Space efficient design - easily stacked 2 high when full & 3 high when empty
✓	Unique pitched outer lid - designed to allow for dust & rain regress
✓	The primary hatch plate comes complete with a secure lockable design & and has beading around the lid closing position

Optional extra - Bespoke colours available



### PRIMARY

3 inch fusible fill cap, 2 inch pressure vacuum vent, standard breather vent, 3 x 1 1/4" feed. **Fitting Plate:** sockets, 3 x 1" return sockets, float level fuel gauge.

### SECONDARY


**Fitting Plate:** Supplied with blank plate as standard, optional return & feed sockets available.

APPROVALS & CERTIFICATIONS			
Capacity (Liters)	2000	Outer Tank Thickness (mm)	3
Capacity (US Gallons)	528	Inner Tank Thickness (mm)	4
Length (mm/ft)	2525 / 8'3"	Weight, Tare (Kg/lb)	980 / 2160
Width (mm/ft)	1085 / 3'7"	Weight, Laden (Kg/lb)	2680 / 5908
Height (mm/ft)	1075 / 3'6"	Safe Fuel Fill Levels (Liters)	1900

\*Calculations are based on safe fill levels at 95% total tank capacity & specific gravity of diesel as 0.9

### COMPLETELY REMOVABLE INNER TANK

- 1: External Lid
- 2: Primary Hatch Cover Lid
- 3: Stacking Cover with Lifting Lugs
- 4: Primary Hatch Fittings Plate
- 5: Bracket for Dispensing Nozzle
- 6: Internal Steel Fuel Pipes
- 7: Pump Bracket System
- 8: Hose Reel Brackets
- 9: Forklift Access
- 10: Secondary Hatch Cover Lid
- 11: Secondary Hatch Fittings Plate (fittings optional extra)
- 12: Inner Primary Tank Lifting Lug
- 13: Inner Primary Tank
- 14: External Bund Tank
- 15: Skid Mounted Base Frame
- 16: Bi-Directional Forklift Pockets

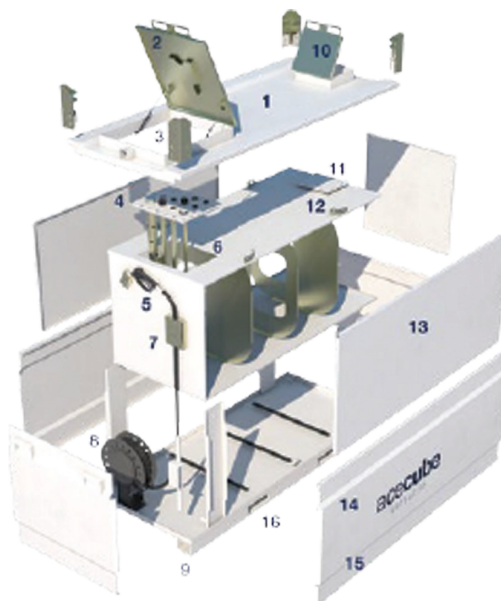

## acecube All Terrain

### ● STANDARD

Primary Hatch Plate

Stacking Corner and Lifting Eye

Universal Pump Bracket



### ● OPTIONAL

Retractable Hose Reels

Dispensing Nozzles

Electric Pumps

